



COMET PIR

SLIM FLOODLIGHTS WITH PIR

The Comet floodlight offers a comprehensive range of outputs. This versatility, combined with a choice of PIR and Photocell options pre-wired cable and U shaped mounting bracket makes Comet extremely cost effective.



Features

- Choice of IP65 PIR and photocell control options.
- Prewired 1m rubber cable
- U shaped mounting bracket



Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
CMT30PIR-40	Comet Floodlight 30W 3000lm c/w PIR 4000K IP65 Black	3000 lm		30W	100 lm/W

Product Information

Guarantee	3 Years
On-Site Warranty	1 Year
Colour Appearance (CCT)	4000 K
IP Rating	IP65
IK Rating	IK07
Voltage	220-240V
Material (Body/Housing)	Aluminum
Material (Diffuser/Cover)	Polycarbonate
Colour Rendition (CRI)	Ra > 80

Colour Finish	Black RAL 9017
LED Life Expectancy	L70B50 50,000 Hours
Power Factor	>0.9
Frequency	50/60Hz
Driver Type	Fixed Output
Approval	UKCA CE
Electrical Class	Class I
Working Temperature	-30°C to 45°C





COMET PIR

SLIM FLOODLIGHTS WITH PIR

Packaging Information

Dimensions (mm)	L: 171 x W: 207 x D: 57 mm
Product Net Weight (kg)	0.667 kg
Barcode	5055807625692
Box Dimensions (mm)	L: 180 x W: 70 x D: 215 mm
Box Gross Weight (kg)	0.8 kg

Units/Outer Carton	10
Outer Carton Barcode	15055807625699
Outer Carton Dimensions (mm)	L: 380 x W: 380 x D: 240 mm
Outer Carton Gross Weight (kg)	8.3 kg

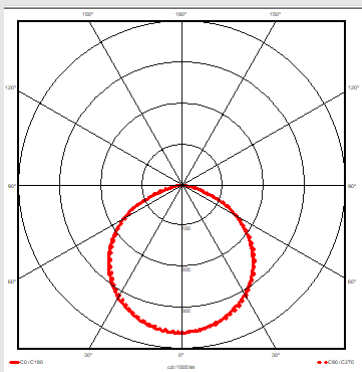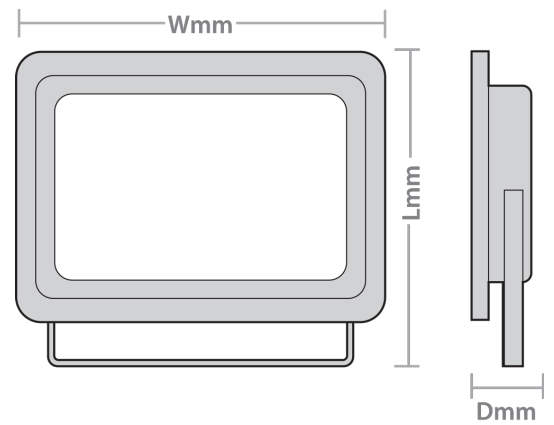

ENERGY
 Red Arrow
 CMTXXX-40

A
 B
 C
 D
 E
F
 G

10-300
 kWh/1000h