

SPECIFICATION SHEET

LED BULKHEADS



The LED Bulkheads are available with clear prismatic, red prismatic and opal diffusers. Suitable for use in 110V or 240V applications. Ideal for use on construction site hoardings.

Applications

- Multi-Storey Carparks
- Commercial Sites
- Factories
- Site Lighting

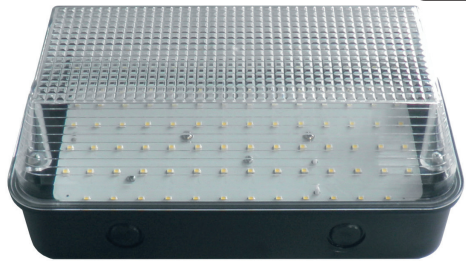


Image shown LF12LEDBC


Specification

LED:	SMD 2835 0.2W/pcs
Material:	Polycarbonate
Colour Temperature:	6000K (only applicable to LF12LEDBC)
Guarantee:	2 Years
Life Expectancy:	30,000 Hours
Working Temperature:	-20°C - 50°C

Additional Information

- Black finish
- Clear / Red / Opal diffuser options

Dimensions

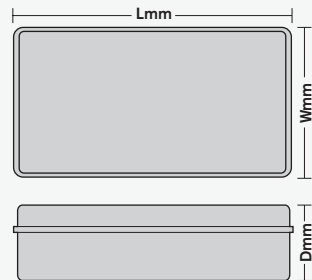

Code	Diffuser	Lumen Output	Colour Temperature	IP Rating	Dimensions (L x W x D mm)
LF12LEDBC	Clear	720lm	6000K	IP65	240 x 120 x 114
LF12LEDBO	Opal	550lm	-	IP44	245 x 125 x 115
LF12LEDBR	Red	720lm	-	IP65	240 x 120 x 114