



LIGHTING CATALOGUE

Simple. Beautiful. Bright



WiZ



Home



Outdoor



Professional



Welcome

4Lite specialise in the design, manufacture and distribution of high quality, energy saving luminaries for a variety of solutions. A division of Ansell Lighting, 4Lite is built upon 25 years' experience and knowledge of the electrical industry. With facilities around the world dedicated to research, product development and testing – we have the resources and expertise to create cost-effective, market leading products and provide exceptional service.

Our state of the art showroom in Knutsford showcases the entirety of our product offering, presenting products covering, internal, external, industrial, emergency and connected lighting.

Whether you're an electrical expert looking to purchase quality, stylish products for a client's kitchen, or you're simply looking to purchase some under cabinet lighting for a DIY project in your own kitchen. 4Lite are here to help.

We hope our catalogue provides you with everything that you need to know; but in the event that it does not please do not hesitate to contact us. Our sales team will be happy to provide assistance and advice on any of the products.

CONTENTS



WiZ

| 08-53

| | |
|-----------------|----|
| Smart Bulbs | 08 |
| Smart Filaments | 16 |
| Smart Lamp | 22 |
| Smart Strip | 24 |
| Smart Plug | 26 |
| Smart Remote | 27 |
| Smart Motion | 28 |
| Smart Downlight | 30 |
| Smart Pendant | 36 |
| Smart Exterior | 48 |



Home

| 54-87

| | |
|--------------|----|
| Downlights | 56 |
| Kitchen | 66 |
| Wall/Ceiling | 72 |
| Pendants | 74 |



Outdoor

| 88-129

| | |
|----------------------|-----|
| Solar | 90 |
| Spike Lights | 98 |
| Portable Lanterns | 102 |
| Bollards | 104 |
| Floodlights | 106 |
| Security Light | 110 |
| Wall Lights | 112 |
| Lanterns | 120 |
| Bulkheads | 124 |
| Low Level Wall Light | 127 |
| Inground Light | 128 |
| Strip Light | 129 |



Professional

| 130-152

| | |
|---------------------|-----|
| Downlights | 132 |
| Ceiling/Wall Lights | 142 |
| UFO | 146 |
| IP65 Non-Corrosive | 148 |
| Surface Linear | 150 |

I PAGE GUIDE

The guide below will give a comprehensive overview of the layout of this catalogue to ensure a better understanding of our product ranges.



1 SECTION INDICATOR
A easy reference to product section and name

2 FEATURE IMAGES
Images of complete product range and any applicable features

3 PRODUCT SYMBOLS AND FEATURES
An easily relatable reference to all attributes, features and corresponding benefits of the product range

4 LINE DRAWINGS
Detailed dimension drawings of each product variant

ICON GUIDE

The icon guide below provides a quick and easily relatable visual guide to the main features, product compliance, specification and installation of all of our product ranges.

FEATURES



WARRANTY

Please consult our website for all warranty information
www.4liteuk.com

IP65

IP65 INGRESS PROTECTION

This product achieves full IP65 ingress protection rating



AC LED

This product utilises AC alternating current



BLUETOOTH

This product is bluetooth enabled and can be controlled using a smart device



WI-FI

This product is Wi-Fi enabled and can be controlled using a smart device



FIRE RATING

This product is fully tested for 30, 60 and 90 minute ceiling types to meet Part B of Building Regulations



DIMMABLE

This product is dimmable



SOLAR

This product utilises solar powered batteries



USB

This product utilises batteries and is charged using USB 2.0



CCT SELECTABLE

The colour temperature on this product can be selected

COMPLIANCE



PART C

This product is fully tested to meet Part C of Building Regulations (resistance to contaminants and moisture)



PART E

This product is fully tested to meet Part E of Building Regulations (resistance to sound)



CE MARK

This product complies to the European Community Conformity



UKCA MARK

This product is UK Conformity Assessed

SPECIFICATION



BEAM ANGLE

The beam angle achieved by the specified product



CLASS II

This product has double insulation



CLASS I

This product has an earth connection



GU10

This product will use a GU10 bulb



CLASS III

This product has Supply of Safety Extra Low Voltage (SELV)



E27

This product will use a E27 bulb



RGB LED

This product can be programmed to use red, green and blue LED light



B22

This product will use a B22 bulb



ZONE 1

This product is compatible for use in bathroom Zone 1: BSEN7671:2008



COLOUR RENDERING INDEX (CRI)

The colour rendering index of the specified product



ZONE 2

This product is compatible for use in bathroom Zone 2: BSEN7671:2008



PIR SENSOR

This product has an integral PIR sensor

INSTALLATION



CIRCULAR HOLE CUT OUT

This product will require the specified hole cut-out size in the ceiling for installation



WIZ

| 08-53

| | |
|-----------------|----|
| Smart Bulbs | 08 |
| Smart Filaments | 16 |
| Smart Lamp | 22 |
| Smart Strip | 24 |
| Smart Plug | 26 |
| Smart Remote | 27 |
| Smart Motion | 28 |
| Smart Downlight | 30 |
| Smart Pendant | 36 |
| Smart Exterior | 48 |









• 4L1/8000




• 4L1/8001

A60 LED Smart Bulbs

| Features | Compliance | Specification |
|---|---|---|
|   |   |    |

- Create a relaxing atmosphere with a warm, cosy white colour.
- Warm white dimmable smart bulbs in E27 Edison screw and B22 bayonet options.
- Control your lights wirelessly and remotely with the WiZ App.
- Can be controlled via the WiZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- LED bulb rated lifetime 25,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|--------------------|---------|------------------|-------|
| 4L1/8000 | A60 E27 Smart Bulb | 9W | 806 | 2700K |
| 4L1/8001 | A60 B22 Smart Bulb | 9W | 806 | 2700K |

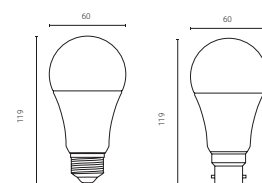

• 4L1/8000

• 4L1/8001







• 4L1/8002

• 4L1/8004

• 4L1/8003

A60 and G95 LED Smart Bulbs

Features



Compliance




Specification



- Create the perfect mood in your home with millions of colours.
- 16 million colours and tuneable white dimmable smart bulbs in E27 Edison screw and B22 bayonet options (A60 version only)
- Control your lights wirelessly and remotely with the WiZ App.
- Can be controlled via the WiZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- LED bulb rated lifetime 25,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|----------------------------------|---------|------------------|-----------------------|
| 4L1/8002 | A60 SMD Bulb Wi-Fi/Bluetooth B22 | 8W | 806 | 2,200K - 6,500K + RGB |
| 4L1/8003 | A60 SMD Bulb Wi-Fi/Bluetooth E27 | 8W | 806 | 2,200K - 6,500K + RGB |
| 4L1/8004 | G95 SMD Bulb Wi-Fi/Bluetooth E27 | 11W | 1055 | 2,200K - 6,500K + RGB |

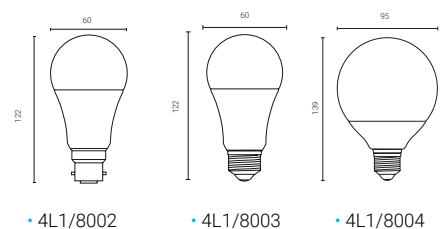

• 4L1/8002

• 4L1/8003

• 4L1/8004



• 4L1/8040




• 4L1/8041

GU10 LED Smart Bulbs

| Features | Compliance | Specification |
|--|---|---|
|     (4L1/8040 only) |    |   |

- Create a relaxing atmosphere with a warm, cosy white colour (4L1/8040) or millions of colours (4L1/8041).
- Control your lights wirelessly and remotely with the WiZ App.
- Can be controlled via the WiZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- LED bulb 5.5W - equivalent to 50W, rated lifetime 25,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|------------------------------------|---------|------------------|-----------------------|
| 4L1/8040 | GU10 Colours & Tunable White Wi-Fi | 5.5W | 350 | 2,200K - 6,500K + RGB |
| 4L1/8041 | GU10 WW Smart Bulb Wi-Fi | 5.5W | 350 | 2,700K |



• 4L1/8040 + 4L1/8041





• 4L1/8042




• 4L1/8043

GU10 LED Smart Bulbs

| Features | Compliance | Specification |
|--|---|---|
|      (4L1/8043 only) |   |   |

- Create a relaxing atmosphere with a warm, cosy white colour (4L1/8042) or millions of colours (4L1/8043).
- Control your lights wirelessly and remotely with the WiZ App.
- Can be controlled via the WiZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- LED bulb 4.9W - equivalent to 50W, rated lifetime 15,000 hours (4L1/8042 and 4L1/8043).

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|---|---------|------------------|----------------------|
| 4L1/8042 | GU10 Colours & Tunable White Wi-Fi+Bluetooth | 4.9W | 345 | 2,700K - 6,500K |
| 4L1/8043 | GU10 Tunable White Smart Bulb Wi-Fi + Bluetooth | 4.9W | 345 | 2,200K - 6500K & RGB |



• 4L1/8042 + 4L1/8043







• 4L1/8012



• 4L1/8013



• 4L1/8016



• 4L1/8017

A60 Filament LED Smart Bulbs

Features



Compliance




Specification



- Vintage lighting meets smart technology.
- Tuneable and dimmable filament bulbs in E27 Edison screw and B22 bayonet options.
- Control your lights wirelessly and remotely with the WiZ App.
- Can be controlled via the WiZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- LED bulb 6.5W - equivalent to 50W, rated lifetime 15,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|-----------------------------|---------|------------------|-----------------|
| 4L1/8012 | A60 Filament Bulb Amber B22 | 6.5W | 720 | 2,000K - 4,500K |
| 4L1/8013 | A60 Filament Bulb Smoky B22 | 6.5W | 400 | 2,000K - 5,000K |
| 4L1/8016 | A60 Filament Bulb Amber E27 | 6.5W | 720 | 2,000K - 4,500K |
| 4L1/8017 | A60 Filament Bulb Smoky E27 | 6.5W | 400 | 2,000K - 5,000K |



• 4L1/8012 • 4L1/8016
• 4L1/8013 • 4L1/8017



• 4L1/8010



• 4L1/8011



• 4L1/8014




• 4L1/8015

ST64 Filament LED Smart Bulbs

| Features | Compliance | Specification |
|----------|------------|---------------|
| | | |

- Vintage lighting meets smart technology.
- Tuneable and dimmable filament bulbs in E27 Edison screw and B22 bayonet options.
- Control your lights wirelessly and remotely with the WiZ App.
- Can be controlled via the WiZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- LED bulb 6.5W - equivalent to 50W, rated lifetime 15,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|------------------------------|---------|------------------|---------------|
| 4L1/8010 | ST64 Filament Bulb Amber B22 | 6.5W | 720 | 2,000K-4,500K |
| 4L1/8011 | ST64 Filament Bulb Smoky B22 | 6.5W | 400 | 2,000K-5,000K |
| 4L1/8014 | ST64 Filament Bulb Amber E27 | 6.5W | 720 | 2,000K-4,500K |
| 4L1/8015 | ST64 Filament Bulb Smoky E27 | 6.5W | 400 | 2,000K-5,000K |



• 4L1/8010
• 4L1/8011

• 4L1/8014
• 4L1/8015







• 4L1/8018



• 4L1/8019

G125 Filament LED Smart Bulbs

Features



Compliance




Specification



- Vintage lighting meets smart technology.
- Tuneable and dimmable filament bulbs in E27 Edison screw.
- Control your lights wirelessly and remotely with the WiZ App.
- Can be controlled via the WiZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- LED bulb 6.5W - equivalent to 54W, rated lifetime 15,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|------------------------------|---------|------------------|---------------|
| 4L1/8018 | G125 Filament Bulb Amber E27 | 6.5W | 725 | 2,000K-4,500K |
| 4L1/8019 | G125 Filament Bulb Smoky E27 | 6.5W | 400 | 2,000K-5,000K |







4L1/8020

Cosmos LED Smart Lamp

Features




Compliance



- Classic timeless design coupled with intelligent control.
- Colours and tuneable white dimmable lamp.
- Control your lights wirelessly and remotely with the WiZ App.
- Can be controlled via the WiZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- Lamp rated lifetime 25,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|-------------|---------|------------------|---------------|
| 4L1/8020 | Smart Lamp | 13W | 810 | 2,200K-6,500K |











• 4L1/8022




• 4L1/8023

LED Smart Strip Light & Extension Kit

| Features | Specification | Compliance |
|---|---|---|
|     |  |  |

- Supplied with UK plug.
- LED strip light and extensions kits are 2 metres in length and can be joined together up to a maximum of 10 metres.
- Add atmosphere, functionality and style.
- Control your lights wirelessly and remotely with the WiZ App.
- Can be controlled via the WiZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- LED strip rated lifetime 25,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|----------------------------|---------|------------------|---------------|
| 4L1/8022 | 2m Strip Light | 30W | 2000 | 2,700K-6,500K |
| 4L1/8023 | 2m Strip Light - Extension | N/A | N/A | 2,700K-6,500K |

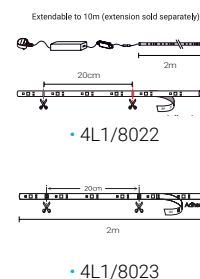






Smart Plug

| Features | Compliance |
|----------|------------|
|----------|------------|



- Smart plug can be controlled from your phone or by using voice activation.
- Works with most electrical appliances.
- Vacation mode.
- Works with - Hey Google, Amazon Alexa, Siri, Samsung Smart Things and IFTTT.
- Schedules and events management.
- Energy saving.

| SKU Code | Description |
|----------|------------------|
| 4L1/8035 | Wi-Fi Smart Plug |





Smart Remote

Features



Compliance




- Control your smart lights with the remote control.
- Compatible with all WiZ Connected products.
- 4 preset scenes in a room.
- On/Off and activate Circadian Rhythm.
- Dimming and night light for the room.
- Instant pairing.

SKU Code

Description



4L1/8031

Wi-Fi Remote Control






Smart Motion Sensor PIR

| Features | Compliance |
|---|---|
|  |  |

- Battery operated.
- PIR sensing technology to detect motion.
- Communicates directly with ALL WiZ Connected luminaires.
- Compatible with the complete 4lite WiZ Connected range.
- PIR activation range 3 metres.

| SKU Code | Description |
|----------|-------------------|
| 4L1/8036 | WiFi Smart Sensor |







• 4L1/2210



• 4L1/2211



• 4L1/2212



• 4L1/2210 - Profile




• Supplied with Smart Wi-Fi and Bluetooth GU10 LED bulb

Smart LED Fire Rated Downlight IP65 GU10 Downlight

| Features | Compliance | Specification | Installation |
|----------|------------|---------------|--------------|
| | | | |

- Compact IP65 fire rated downlight for shallow ceiling spaces.
- Twistlock bulb retaining ring for ease of bulb replacement.
- Rubber coated spring clips for ease of installation and ceiling protection.
- Supplied with smart GU10 LED bulb Wi-Fi & Bluetooth, tuneable white and dimmable.
- Control your lights wirelessly and remotely with the WIZ App.
- Can be controlled via the WIZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- LED bulb 4.9W - equivalent to 50W, rated lifetime 15,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|-------------------|---------|------------------|-----------------|
| 4L1/2210 | Matt White GU10 | 4.9W | 345 | 2,700K - 6,500K |
| 4L1/2211 | Chrome GU10 | 4.9W | 345 | 2,700K - 6,500K |
| 4L1/2212 | Satin Chrome GU10 | 4.9W | 345 | 2,700K - 6,500K |

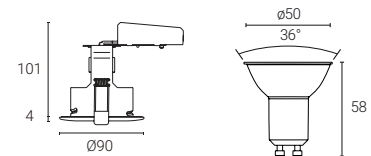







• 4L1/2213



• 4L1/2214



• 4L1/2215



• 4L1/2213 - Profile




• Supplied with Smart Wi-Fi and Bluetooth GU10 LED bulb

Smart LED Fire Rated Downlight IP20 GU10 Downlight

| Features | Compliance | Specification | Installation |
|----------|------------|---------------|--------------|
| | | | 76mm |

- Compact IP20 fire rated downlight for shallow ceiling spaces.
- Twistlock bulb retaining ring for ease of bulb replacement.
- Rubber coated spring clips for ease of installation and ceiling protection.
- Supplied with smart GU10 LED bulb Wi-Fi & Bluetooth, tuneable white and dimmable.
- Control your lights wirelessly and remotely with the WIZ App.
- Can be controlled via the WIZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- LED bulb 4.9W - equivalent to 50W, rated lifetime 15,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|-------------------|---------|------------------|-----------------|
| 4L1/2213 | Chrome GU10 | 4.9W | 345 | 2,700K - 6,500K |
| 4L1/2214 | Matt White GU10 | 4.9W | 345 | 2,700K - 6,500K |
| 4L1/2215 | Satin Chrome GU10 | 4.9W | 345 | 2,700K - 6,500K |

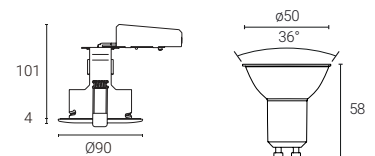



• 4L1/2216



• 4L1/2217



• 4L1/2218



• 4L1/2216 - Profile




• Supplied with Smart Wi-Fi and Bluetooth GU10 LED bulb

Smart LED Fire Rated Downlight IP20 GU10 Adjustable Downlight

| Features | Compliance | Specification | Installation |
|----------|------------|---------------|--------------|
| | | | 80mm |

- Compact fire rated adjustable downlight for shallow ceiling spaces.
- Twistlock bulb retaining ring for ease of bulb replacement.
- Rubber coated spring clips for ease of installation and ceiling protection.
- Supplied with GU10 LED bulb Wi-Fi & Bluetooth, tuneable white and dimmable.
- Control your lights wirelessly and remotely with the WiZ App.
- Can be controlled via the WiZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- LED bulb 4.9W - equivalent to 50W, rated lifetime 15,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|-------------------|---------|------------------|-----------------|
| 4L1/2216 | Chrome GU10 | 4.9W | 345 | 2,700K - 6,500K |
| 4L1/2217 | Matt White GU10 | 4.9W | 345 | 2,700K - 6,500K |
| 4L1/2218 | Satin Chrome GU10 | 4.9W | 345 | 2,700K - 6,500K |

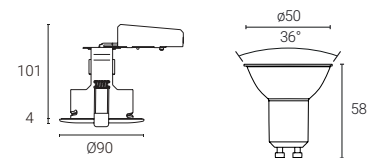











• 4L1/7016




• Supplied with 3x Smart Wi-Fi G125 LED filament bulbs

3-way Plate Pendant Blackened Silver with Amber G125 Filament LED Smart Bulbs

| Features | Compliance | Specification |
|---|---|---|
|    |  |   |

- Decorative vintage industrial style design 3-way plate pendant.
- Supplied with 3 x G125 LED amber coated filament bulbs and suspension accessory.
- 1.5m adjustable cable length allowing for a varied installation height.
- Control your lights wirelessly and remotely with the WiZ App.
- Can be controlled via the WiZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- LED bulb 6.5W - equivalent to 54W, rated lifetime 15,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|---|----------|------------------|---------------|
| 4L1/7016 | 3 Circle Pendant - Blackened Silver inc. 3 x E27 G125 Filament Bulbs - Amber | 3 x 6.5W | 3 x 725 | 2,000K-4,500K |

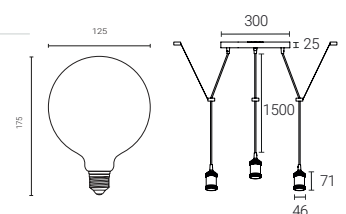












• Supplied with 3x Smart Wi-Fi G125 LED filament bulbs


• 4L1/7017

3-way Bar Pendant Blackened Silver with Amber G125 Filament LED Smart Bulbs

| Features | Compliance | Specification |
|---|---|---|
|    |   |   |

- Decorative vintage industrial style design 3-way bar pendant.
- Supplied with 3 x G125 LED amber coated filament bulbs and suspension accessory.
- 1.5m adjustable cable length allowing for a varied installation height.
- Control your lights wirelessly and remotely with the WiZ App.
- Can be controlled via the WiZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- LED bulb 6.5W - equivalent to 54W, rated lifetime 15,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|--|----------|------------------|---------------|
| 4L1/7017 | 3 Bar Pendant - Blackened Silver inc. 3 x E27 G125 Filament Bulbs - Amber | 3 x 6.5W | 3 x 725 | 2,000K-4,500K |

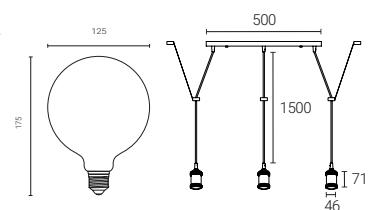












• Supplied with Smart Wi-Fi ST64 LED filament bulb


• 4L1/7015

Bird Cage Pendant with Amber ST64 Filament LED Smart Bulb

| Features | Compliance | Specification |
|---|---|---|
|    |   |   |

- Stylish round cage with tuneable and dimmable filament amber ST64 bulb.
- Supplied with ST64 LED amber coated filament bulb and suspension accessory.
- 1.5m adjustable cable length allowing for a varied installation height.
- Control your lights wirelessly and remotely with the WiZ App.
- Can be controlled via the WiZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- LED bulb 6.5W - equivalent to 50W, rated lifetime 15,000 hours.

| SKU Code | Description | Wattage | LED Output | CCT |
|----------|---|---------|------------|---------------|
| 4L1/7015 | Bird Cage Pendant - Matt Black inc. E27 ST64 Filament Bulb - Amber | 6.5W | 720 | 2,000K-4,500K |













• 4L1/7014




• Supplied with Smart Wi-Fi ST64 LED filament bulb

Pear Cage Pendant with Amber ST64 Filament LED Smart Bulb

| Features | Compliance | Specification |
|---|---|---|
|    |  |   |

- Stylish cage with tuneable and dimmable filament amber ST64 bulb.
- Supplied with ST64 LED amber coated filament bulb and suspension accessory.
- 1.5m adjustable cable length allowing for a varied installation height.
- Control your lights wirelessly and remotely with the WiZ App.
- Can be controlled via the WiZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- LED bulb 6.5W - equivalent to 50W, rated lifetime 15,000 hours.

| SKU Code | Description | Wattage | LED Output | CCT |
|----------|--|---------|------------|---------------|
| 4L1/7014 | Pear Cage Pendant - Matt Black inc. E27 ST64 Filament Bulb - Amber | 6.5W | 720 | 2,000K-4,500K |













• 4L1/7003




• Supplied with Smart Wi-Fi ST64 LED filament bulb

Single Pendant Blackened Silver with Amber ST64 Filament LED Smart Bulb

| Features | Compliance | Specification |
|---|---|---|
|    |  |   |

- Decorative vintage pendant design with tuneable and dimmable filament ST64 bulb.
- Supplied with ST64 LED amber coated filament bulb and suspension accessory.
- 1.5m adjustable cable length allowing for a varied installation height.
- Control your lights wirelessly and remotely with the WIZ App.
- Can be controlled via the WIZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- LED bulb 6.5W - equivalent to 50W, rated lifetime 15,000 hours.

| SKU Code | Description | Wattage | LED Output |
|----------|---|---------|------------|
| 4L1/7003 | Vintage Pendant - Blackened Silver inc. E27 ST64 Filament Bulb - Amber | 6.5W | 720 |














• Supplied with Smart Wi-Fi G125 LED filament bulb

• 4L1/7004

Single Pendant Blackened Silver with Amber G125 Filament LED Smart Bulb

| Features | Compliance | Specification |
|--|---|---|
|    |  |   |
| <ul style="list-style-type: none"> Decorative vintage pendant design with tuneable and dimmable G125 filament bulb. Supplied with G125 LED amber coated filament bulb and suspension accessory. 1.5m adjustable cable length allowing for a varied installation height. Control your lights wirelessly and remotely with the WIZ App. Can be controlled via the WIZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings. LED bulb 6.5W - equivalent to 54W, rated lifetime 15,000 hours | | |

| SKU Code | Description | Wattage | LED Output |
|----------|--|---------|------------|
| 4L1/7004 | Vintage Pendant - Blackened Silver inc. E27 G125 Filament Bulb - Amber | 6.5W | 725 |
















• Supplied with Smart Wi-Fi ST64 LED filament bulb


• 4L2/6102

Smart Outdoor LED Modern Exterior Wall Light

| Features | Compliance | Specification |
|---|---|--|
|    |  |      |

- Contemporary box style exterior wall light.
- Die cast aluminium construction with tempered glass enclosure.
- Textured powder coated anthracite finish.
- Supplied with Smart A60 LED filament bulb tuneable white and dimmable.
- Control your lights wirelessly and remotely with the WiZ app.
- Can be controlled via the WiZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- LED bulb 6.5W - equivalent to 50W, rated lifetime 15,000 hours.

| SKU Code | Description | Wattage | LED Output |
|----------|---|---------|------------|
| 4L2/6102 | Modern E27 Exterior Wall Light inc. E27 A60 Filament Bulb - Amber | 6.5W | 720 |

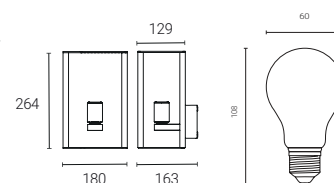





• 4L2/2010 - Spike Mounted



• 4L2/2010 - Surface Mounted




• Supplied with Smart Wi-Fi and Bluetooth GU10 LED bulb

Smart Outdoor LED Spike Light

| Features | Compliance | Specification |
|--|---|--|
| IP65      |   |    |

- Multi-purpose smart LED garden spotlight supplied with wall mounting bracket and spike.
- Pre-wired with 2 metres of rubber insulated cable.
- Powder coated die-cast aluminium body ensures maximum product endurance.
- Supplied with Smart GU10 LED bulb Wi-Fi & Bluetooth, tuneable white and dimmable.
- Control your lights wirelessly and remotely with the WiZ App.
- Can be controlled via the WiZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- LED bulb 4.9W - equivalent to 50W, rated lifetime 15,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|-------------------------------------|---------|------------------|----------------------|
| 4L2/2010 | Spike Light inc. GU10 Smart Bulb | 4.9W | 345 | 2,200K - 6500K & RGB |

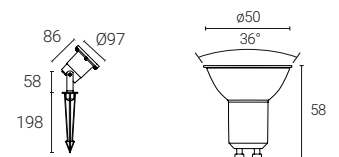





• 4L2/2305




• Supplied with 2x Smart Wi-Fi and Bluetooth GU10 LED bulbs

Smart Outdoor LED Up and Down Wall Light

| Features | Compliance | Specification |
|--|---|--|
| IP54      |   |    |

- Elegant bi-directional wall light GU10, suitable for external applications.
- Textured paint finish and sleek design provide a modern architectural aesthetic.
- Die-cast aluminium construction ensures maximum durability.
- Supplied with 2x Smart GU10 LED bulbs Wi-Fi & Bluetooth, tuneable white and dimmable.
- Control your lights wirelessly and remotely with the WiZ App.
- Can be controlled via the WiZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- LED bulb 4.9W - equivalent to 50W, rated lifetime 15,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|--|---------|------------------|----------------------|
| 4L2/2305 | Bi-directional Wall inc. GU10 Smart Bulb | 4.9W | 345 | 2,200K - 6500K & RGB |

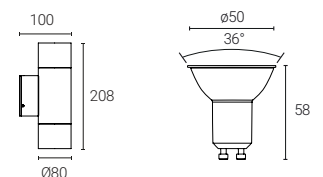





Home

| 56-87

| | |
|--------------|----|
| Downlights | 56 |
| Kitchen | 66 |
| Wall/Ceiling | 72 |
| Pendants | 74 |







• 4L1/2000/4



• 4L1/2000/4 (fitted with 4L1/2002)



• 4L1/2000/4 (fitted with 4L1/2003)



• 4L1/2000/4 (fitted with 4L1/2004)




• Low profile design allows installation into reduced height ceiling voids

Fire Rated Downlight LED

| Features | Compliance | Specification | Installation |
|----------|------------|---------------|--------------|
| | | | |

- LED dimmable fire-rated downlight for domestic applications.
- Supplied with matt white bezel as standard.
- Integral driver with push-fit loop-in, loop-out terminals for ease and speed of installation.
- LED lifespan L70 40,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|------------|--------------------|---------|------------------|-------|
| 4L1/2000/3 | Downlight LED | 8.5W | 653 | 3000K |
| 4L1/2000/4 | Downlight LED | 8.5W | 716 | 4000K |
| 4L1/2002 | Chrome Bezel | | | |
| 4L1/2003 | Satin Chrome Bezel | | | |
| 4L1/2004 | Black Bezel | | | |







• 4L1/2001



• 4L1/2000/4 (fitted with 4L1/2002)



• 4L1/2000/4 (fitted with 4L1/2003)



• 4L1/2000/4 (fitted with 4L1/2004)



• Integral switch allows user the choice of 3000K, 4000K and 6000K colour temperature options




• Low profile design allows installation into reduced height ceiling voids

Fire Rated Downlight LED CCT Selectable

| Features | Compliance | Specification | Installation |
|----------|------------|---------------|--------------|
| | | | 73mm |

- LED dimmable fire-rated downlight for domestic applications.
- Supplied with matt white, chrome and satin chrome bezels as standard.
- Integral switch allows user to change colour temperature between 3000K, 4000K and 6000K.
- Integral driver with push-fit loop-in, loop-out terminals for ease and speed of installation.
- LED lifespan L70 40,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|------------------------------|---------|------------------|-------|
| 4L1/2001 | CCT Selectable Downlight LED | 9W | 717 | 3000K |
| | | | 770 | 4000K |
| | | | 651 | 6000K |





• 4L1/2200



• 4L1/2201



• 4L1/2202




• 4L1/2202 - Profile

IP65 Fire Rated Downlight GU10

| Features | Compliance | Specification | Installation |
|----------|------------|---------------|--------------|
| IP65 | | | 76mm |

- Compact Fire Rated downlight for shallow ceiling voids.
- Twistlock lamp retaining ring for ease of lamp replacement.
- Protective sheathing spring clips for ease of installation and ceiling protection.
- Suitable for standard GU10 halogen or LED lamps.

| SKU Code | Description | Wattage |
|----------|-------------------|----------|
| 4L1/2200 | Matt White GU10 | Upto 50W |
| 4L1/2201 | Chrome GU10 | Upto 50W |
| 4L1/2202 | Satin Chrome GU10 | Upto 50W |







• 4L1/2207



• 4L1/2206









• 4L1/2208




• 4L1/2206 - Profile

Fire Rated Adjustable Downlight GU10

| Features | Compliance | Specification | Installation |
|---|---|---|--|
|  |    |  |  80mm |

- Compact Fire Rated adjustable downlight for shallow ceiling voids.
- Twistlock lamp retaining ring for ease of lamp replacement.
- Protective sheathing spring clips for ease of installation and ceiling protection.
- Suitable for standard GU10 halogen or LED lamps.

| SKU Code | Description | Wattage |
|----------|-------------------|----------|
| 4L1/2206 | Chrome GU10 | Upto 50W |
| 4L1/2207 | Matt White GU10 | Upto 50W |
| 4L1/2208 | Satin Chrome GU10 | Upto 50W |





• 4L1/2204



• 4L1/2203










• 4L1/2205




• 4L1/2206 - Profile

IP20 Fire Rated Downlight GU10

| Features | Compliance | Specification | Installation |
|---|---|---|--|
|  |     |  |  76mm |

- Compact Fire Rated downlight for shallow ceiling voids.
- Twistlock lamp retaining ring for ease of lamp replacement.
- Protective sheathing spring clips for ease of installation and ceiling protection.
- Suitable for standard GU10 halogen or LED lamps.

| SKU Code | Description | Wattage |
|----------|-------------------|----------|
| 4L1/2203 | Chrome GU10 | Upto 50W |
| 4L1/2204 | Matt White GU10 | Upto 50W |
| 4L1/2205 | Satin Chrome GU10 | Upto 50W |





• 4L1/2102/4



• 4L1/2100



• 4L1/2101



• 4L1/2103




• 4L1/2102/4 - Profile

IP65 Downlight LED

| Features | Compliance | Specification | Installation |
|----------|------------|---------------|--------------|
| IP65 | CE UK CA | □ 60° Ra 80 | ⚙️ 68mm-78mm |

- Compact polycarbonate IP65 LED downlight allows for a range of installation applications.
- Low profile design integral driver with loop-in, loop-out terminals for ease and speed of installation.
- Option of chrome and satin chrome bezel accessories.
- LED lifespan L70 25,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|------------|--------------------|---------|------------------|-------|
| 4L1/2102/3 | Downlight LED | 5W | 389 | 3000K |
| 4L1/2102/4 | Downlight LED | 5W | 399 | 4000K |
| 4L1/2100 | Chrome Bezel | | | |
| 4L1/2101 | Satin Chrome Bezel | | | |
| 4L1/2103 | Black Bezel | | | |








Undercabinet Linklight LED

| Specification | Compliance |
|--|---|
| IP20   |   |

- High performance LED undercabinet linklight.
- Suitable for domestic and commercial applications.
- Design allows for continuous linking of products.
- LED lifespan L70 25,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT | A |
|------------|-------------------------|---------|------------------|-------|--------|
| 4L1/1000/3 | LED Linklight - 310mm | 4W | 376 | 3000K | 310mm |
| 4L1/1001/3 | LED Linklight - 570mm | 7W | 658 | 3000K | 570mm |
| 4L1/1002/3 | LED Linklight - 870mm | 9W | 884 | 3000K | 870mm |
| 4L1/1003/3 | LED Linklight - 1170mm | 14W | 1422 | 3000K | 1170mm |
| 4L1/1000/4 | LED Linklight - 310mm | 4W | 394 | 4000K | 310mm |
| 4L1/1001/4 | LED Linklight - 570mm | 7W | 702 | 4000K | 570mm |
| 4L1/1002/4 | LED Linklight - 870mm | 9W | 975 | 4000K | 870mm |
| 4L1/1003/4 | LED Linklight- - 1170mm | 14W | 1488 | 4000K | 1170mm |
| 4L1/1004 | Linklight lead - 300mm | | | | |











• 4L1/1200




• 4L1/1201

Undercabinet Circular LED

| Features | Compliance | Specification |
|---|---|--|
|  |  | IP20   |

- Low profile mains surface mounted circular cabinet light.
- AC LED ensures fast and easy installation without the need for a driver.
- Pre-wired with 1.5 metres mains cable.
- LED lifespan L70 54,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|--------------------------------|---------|------------------|-------|
| 4L1/1200 | Circular Undercabinet - White | 2W | 132 | 4000K |
| 4L1/1201 | Circular Undercabinet - Silver | 2W | 132 | 4000K |








• 4L1/1210/3




• 4L1/1210/4

Undercabinet Triangular LED

| Features | Compliance | Specification |
|----------|------------|--|
| AC LED | CE UK CA | IP20  Ra 80 |

- Low profile mains surface mounted triangular cabinet light kit.
- AC LED ensures fast and easy installation without the need for a driver.
- Pre-wired with 1.5 metres mains cable.
- LED lifespan L70 54,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|------------|--|---------|------------------|-------|
| 4L1/1210/3 | Triangular Undercabinet - Satin Chrome | 2W | 102 | 3000K |
| 4L1/1210/4 | Triangular Undercabinet - Satin Chrome | 2W | 112 | 4000K |









• 4L1/3101/4


IP65 Wall/Ceiling LED

| Features | Compliance | Specification |
|----------|------------|---------------|
|----------|------------|---------------|

| | | |
|--|---|---|
| IP65  |  |  |
|--|---|---|

- Slim wall/ceiling light with contemporary aesthetic.
- All polycarbonate construction with opal diffuser and white trim ring.
- Full IP65 ingress protection rating allows a multitude of installation options including bathrooms.
- LED lifespan L70 56,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|---------------|----------------------------------|---------|------------------|-------|
| 4L1/3101/3 | Wall/Ceiling LED | 13W | 890 | 3000K |
| 4L1/3101/4 | Wall/Ceiling LED | 13W | 929 | 4000K |
| 4L1/3101/3/10 | Emergency 3000K | | | |
| 4L1/3101/3/11 | Microwave Sensor 3000K | | | |
| 4L1/3101/3/12 | Emergency Microwave Sensor 3000K | | | |
| 4L1/3101/4/10 | Emergency 4000K | | | |
| 4L1/3101/4/11 | Microwave Sensor 4000K | | | |
| 4L1/3101/4/12 | Emergency Microwave Sensor 4000K | | | |





• 4L1/7005




• 4L1/7006

Decorative 3 Light Ceiling Pendant

| Specification | Compliance |
|---|---|
|  (bulb not included) |  |

- Decorative circular triple pendant in blackened silver or antique brass finish.
- Fully adjustable 1.5m fabric cable allowing for a varied installation height.
- Suitable for use with E27 bulbs.
- Perfect for use in kitchen areas and living spaces.

| SKU Code | Description |
|----------|---|
| 4L1/7005 | 3 Circle Pendant - Blackened Silver Less Lamp |
| 4L1/7006 | 3 Circle Pendant - Antique Brass Less Lamp |







• 4L1/7007




• 4L1/7008

Decorative 3 Light Bar Ceiling Pendant

| Specification | Compliance |
|---|---|
|  (bulb not included) |  |

- Bar triple pendant in blackened silver or antique brass finish
- Fully adjustable 1.5m fabric cable.
- Suitable for use with E27 bulbs.
- Perfect for use in kitchen areas and living spaces.

| SKU Code | Description |
|----------|---|
| 4L1/7007 | 3 Circle Pendant - Blackened Silver Less Lamp |
| 4L1/7008 | 3 Circle Pendant - Antique Brass Less Lamp |








Pear Decorative Cage

| Specification | Compliance |
|---|---|
|  (bulb not included) |  |

- Decorative pear shaped cage pendant in matt black finish.
- Fully adjustable 1.5m fabric cable.
- Suitable for use with E27 bulbs.
- Perfect for use in kitchen areas and living spaces.

| SKU Code | Description |
|----------|-------------------------------------|
| 4L1/7010 | Cage Pendant - Matt Black Less Lamp |








Globe Decorative Cage

| Specification | Compliance |
|---|---|
|  (bulb not included) |  |

- Decorative globe shaped cage pendant in matt black finish.
- Fully adjustable 1.5m fabric cable.
- Suitable for use with E27 bulbs.
- Perfect for use in kitchen areas and living spaces.

| SKU Code | Description |
|----------|-------------------------------------|
| 4L1/7011 | Cage Pendant - Matt Black Less Lamp |








Bell Decorative Cage

| Specification | Compliance |
|---|---|
|  (bulb not included) |  |

- Decorative bell shaped cage pendant in matt black finish.
- Fully adjustable 1.5m fabric cable.
- Suitable for use with E27 bulbs.
- Perfect for use in kitchen areas and living spaces.

| SKU Code | Description |
|----------|-------------------------------------|
| 4L1/7012 | Cage Pendant - Matt Black Less Lamp |








Decorative Bird Cage

| Specification | Compliance |
|---|---|
|  (bulb not included) |  |

- Decorative bird cage pendant in matt black finish.
- Fully adjustable 1.5m fabric cable.
- Suitable for use with E27 bulbs.
- Perfect for use in kitchen areas and living spaces.

| SKU Code | Description |
|----------|-------------------------------------|
| 4L1/7013 | Cage Pendant - Matt Black Less Lamp |









Filament Pendant LED

Features



Compliance




Specification



- Decorative vintage pendant design suitable for residential, hotel or restaurant applications.
- Supplied with either G125 or ST64 LED amber coated filament lamp and suspension accessory (A60 filament lamp available as accessory).
- LED lifespan L70 15,000 hours.
- 1.0m adjustable cable length allowing for a varied installation height.
- Triac dimmable as standard.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|-----------|--|---------|------------------|-------|
| 4L1/7200 | G125 Filament Pendant - Blackened Silver | 7.5W | 690 | 2500K |
| 4L1/ 7201 | G125 Filament Pendant - Antique Brass | 7.5W | 690 | 2500K |
| 4L1/ 7202 | ST64 Filament Pendant - Blackened Silver | 7.5W | 645 | 2500K |
| 4L1/ 7203 | ST64 Filament Pendant - Antique Brass | 7.5W | 645 | 2500K |

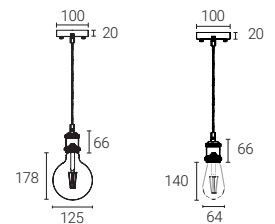



Outdoor

| 90-129

| | |
|----------------------|-----|
| Solar | 90 |
| Spike Lights | 98 |
| Portable Lanterns | 102 |
| Bollards | 104 |
| Floodlights | 106 |
| Security Light | 110 |
| Wall Lights | 112 |
| Lanterns | 120 |
| Bulkheads | 124 |
| Low Level Wall Light | 127 |
| Inground Light | 128 |
| Strip Light | 129 |







Sensing Distance: Max 10m
Time: 8 seconds - 8 minutes
LUX: 10 Lux - 70 Lux

Solar Bollard LED

| Features | Compliance | Specification |
|----------|------------|---------------|
|----------|------------|---------------|




IP54



- Modern die-cast solar powered aluminium LED bollard suitable for domestic applications.
- Graphite textured powder coat paint finish provides enhanced durability.
- Rotatable head design which can swing in $\pm 90^\circ$ allowing for a varied range of installation options.
- PIR motion sensor modes:
Mode 1: 15% output after sunset, motion detected 100% output, no motion 15% output for 15 hours.
Mode 2: Motion detected 100% light output, no motion off.
- LED lifespan L70 36,000 hours.

| SKU Code | Description | Lumens Delivered | CCT |
|----------|-------------------|------------------|-------|
| 4L2/6001 | Solar Bollard LED | 165 | 4000K |






Solar Wall Light LED

| Features | Compliance | Specification |
|----------|------------|---------------|
|----------|------------|---------------|



- Modern die-cast solar powered aluminium LED wall light suitable for domestic applications.
- Graphite textured powder coat paint finish provides enhanced durability.
- Rotatable head design which can swing in $\pm 90^\circ$ allowing for a varied range of installation options.
- PIR motion sensor modes:
Mode 1: 15% output after sunset, motion detected 100% output, no motion 15% output for 15 hours.
Mode 2: Motion detected 100% light output, no motion off.
- LED lifespan L70 36,000 hours.

| SKU Code | Description | Lumens Delivered | CCT |
|----------|----------------------|------------------|-------|
| 4L2/6000 | Solar Wall Light LED | 165 | 4000K |







Sensing Distance: 6m -10m
 Time: 1 minute
 LUX: 10 Lux - 45 Lux

Rectangular Solar Bollard LED

| Features | Compliance | Specification |
|----------|------------|---------------|
|----------|------------|---------------|



IP54




Ra 80



- Modern die-cast solar powered aluminium LED bollard suitable for domestic applications.
- Graphite textured powder coat paint finish provides enhanced durability.
- PIR motion sensor modes:
- **Mode 1:** 15% output after sunset, motion detected 100% output, no motion 15% for 20 hours..
- **Mode 2:** Motion detected 100% output, no motion off.
- LED lifespan L70 36,000 hours.

| SKU Code | Description | Lumens Delivered | CCT |
|----------|-------------------|------------------|-------|
| 4L2/6005 | Solar Bollard LED | 230 | 4000K |





Sensing Distance: 6m -10m
 Time: 1 minute
 LUX: 10 Lux - 45 Lux

Rectangular Solar Wall Light LED

| Features | Compliance | Specification |
|----------|------------|---------------|
|----------|------------|---------------|



IP54




Ra 80



- Modern die-cast solar powered aluminium LED wall light suitable for domestic applications.
- Graphite textured powder coat paint finish provides enhanced durability.
- PIR motion sensor modes:
- **Mode 1:** 15% output after sunset, motion detected 100% output, no motion 15% for 20 hours..
- **Mode 2:** Motion detected 100% output, no motion off.
- LED lifespan L70 36,000 hours.

| SKU Code | Description | Lumens Delivered | CCT |
|----------|----------------------|------------------|-------|
| 4L2/6004 | Solar Wall Light LED | 230 | 4000K |





Sensing Distance: 6m -10m
 Time: 1 minute
 LUX: 10 Lux - 45 Lux

Circular Solar Bollard LED

| Features | Compliance | Specification |
|----------|------------|---------------|
|----------|------------|---------------|




IP54



- Modern die-cast solar powered aluminium LED bollard suitable for domestic applications.
- Graphite textured powder coat paint finish provides enhanced durability.
- PIR motion sensor modes:
- **Mode 1:** 11% output after sunset, motion detected 100% output, no motion 11% for 20 hours.
- **Mode 2:** Motion detected 100% output, no motion off.
- LED lifespan L70 36,000 hours.

| SKU Code | Description | Lumens Delivered | CCT |
|----------|-------------------|------------------|-------|
| 4L2/6003 | Solar Bollard LED | 210 | 4000K |





Sensing Distance: 6m -10m
 Time: 1 minute
 LUX: 10 Lux - 45 Lux

Circular Solar Wall Light LED

| Features | Compliance | Specification |
|----------|------------|---------------|
|----------|------------|---------------|



IP54




Ra 80



- Modern die-cast solar powered aluminium LED wall light suitable for domestic applications.
- Graphite textured powder coat paint finish provides enhanced durability.
- PIR motion sensor modes:
- **Mode 1:** 11% output after sunset, motion detected 100% output, no motion 11% for 20 hours.
- **Mode 2:** Motion detected 100% output, no motion off.
- LED lifespan L70 36,000 hours.

| SKU Code | Description | Lumens Delivered | CCT |
|----------|----------------------|------------------|-------|
| 4L2/6002 | Solar Wall Light LED | 210 | 4000K |







• 4L2/2001 - Spike Mounted




• 4L2/2001 - Surface Mounted

Spike Light LED

| Features | Compliance | Specification |
|----------|------------|---------------|
| IP65 | CE UK CA | ⏏ Ra 80 |

- Multi purpose LED garden spotlight supplied with wall mounting bracket and spike.
- Pre-wired with 2 metres of rubber insulated cable.
- Powder coated die-cast aluminium body ensures maximum product endurance.
- LED lifespan L80 50,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|-----------------|---------|------------------|-------|
| 4L2/2001 | Spike Light LED | 5W | 225 | 4000K |





• 4L2/2000 - Spike Mounted




• 4L2/2000 - Surface Mounted

Spike Light GU10

| Features | Compliance | Specification |
|----------|------------|--|
| IP65 | CE UK CA | GU10  |

- Multi purpose garden spotlight supplied with wall mounting bracket and spike.
- Pre-wired with 2 metres of rubber insulated cable.
- Powder coated die-cast aluminium body ensures maximum product endurance.
- Suitable for GU10 LED lamps only.

| SKU Code | Description | Wattage |
|----------|------------------|---------|
| 4L2/2000 | Spike Light GU10 | Upto 5W |







• 4L2/4100










• 4L2/4101



- 1 Touch: 10%
- 2 Touches: 50%
- 3 Touches: 100%
- 4 Touches: Off


• Multi-level Dimming Switch (4L2/4100 Only)

Portable Lanterns LED

| Features | Compliance | Specification |
|--|---|---|
|  4L2/4101 only  |   |    4L2/4100 only |

- Modern die-cast aluminium LED lanterns suitable for domestic applications.
- Battery powered and charged using USB 2.0 meaning no installation is required, is maintenance free and is completely portable.
- Wireless integrated speaker allows audio playback using bluetooth connectivity between lantern and smart device (4L2/4101 only).
- Multi-level touch switch allows end user option of different light dimming options. (4L2/4100 only).
- L70 36,000 hours average lifetime.

| SKU Code | Description | Wattage | LED Output | CCT |
|----------|----------------------|---------|------------|-------|
| 4L2/4100 | Portable Lantern LED | 5W | 318 | 4000K |
| 4L2/4101 | Portable Lantern LED | 6W | | |

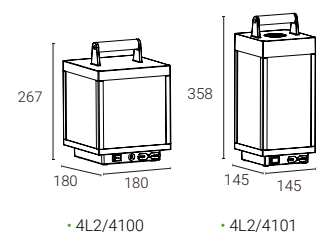

• 4L2/4100

• 4L2/4101







• 4L2/4000 - Closeup view



• 4L2/4000



• 4L2/4001

Domestic Bollard LED

Compliance




Specification



- Slim modern bollard with graphite paint finish.
- Die-cast aluminium construction with polycarbonate lens ensures maximum durability
- LED lifespan L80 50,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT | A |
|----------|---------------|---------|------------------|-------|-------|
| 4L2/4000 | 700mm Bollard | 8W | 268 | 4000K | 700mm |
| 4L2/4001 | 900mm Bollard | 8W | 268 | 4000K | 900mm |







• 4L2/1000



• 4L2/1001



• 4L2/1002




• 4L2/1003

Die-cast Floodlight LED

| Features | Compliance | Specification |
|----------|------------|---------------|
| IP65 | CE UK CA | ⊕ Ra 80 |

- Contemporary and slim architectural LED floodlight suitable for a range of applications.
- Textured diffuser design provides excellent light uniformity.
- Die-cast aluminium construction ensures durability and strength.
- LED lifetime L70 15,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT | A | B | C |
|----------|----------------|---------|------------------|-------|-------|-------|------|
| 4L2/1000 | Die-cast Flood | 10W | 885 | 4000K | 110mm | 100mm | 27mm |
| 4L2/1001 | Die-cast Flood | 20W | 1581 | 4000K | 130mm | 117mm | 28mm |
| 4L2/1002 | Die-cast Flood | 30W | 2475 | 4000K | 170mm | 145mm | 36mm |
| 4L2/1003 | Die-cast Flood | 50W | 3992 | 4000K | 240mm | 200mm | 37mm |





• 4L2/1004



• 4L2/1005






• 4L2/1006




• 4L2/1007

Die-cast Floodlight LED PIR

| Features | Compliance | Specification |
|----------|------------|---|
| IP65 | CE UK CA |    Sensing Distance: 0m~8m Time: 5 ±20 seconds LUX: Day>30 Lux - Night<5 Lux |

- Contemporary and slim architectural LED floodlight suitable for a range of applications.
- PIR offers convenience and security
- Textured diffuser design provides excellent light uniformity.
- Die-cast aluminium construction ensures durability and strength.
- LED lifetime L70 15,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT | A | B | C |
|----------|--------------------|---------|------------------|-------|-------|-------|------|
| 4L2/1004 | Die-cast Flood PIR | 10W | 885 | 4000K | 110mm | 100mm | 41mm |
| 4L2/1005 | Die-cast Flood PIR | 20W | 1581 | 4000K | 130mm | 117mm | 42mm |
| 4L2/1006 | Die-cast Flood PIR | 30W | 2475 | 4000K | 170mm | 145mm | 50mm |
| 4L2/1007 | Die-cast Flood PIR | 50W | 3992 | 4000K | 240mm | 200mm | 51mm |










Security Light LED

Compliance **Specification**



- Compact high brightness LED security light.
- Robust die-cast aluminium LED heat sink for optimal thermal performance with polycarbonate housing.
- Individually adjustable heads to illuminate desired location.
- Adjustable PIR direction point.
- PIR settings that can adjust the detection range, detection distance, time delay and ambient light levels.
- LED lifetime L70 15,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|--------------------|---------|------------------|-------|
| 4L2/1100 | Security Light LED | 46W | 3719 | 4000K |







• 4L2/2301


Bi-directional Wall LED

| Compliance | Specification |
|------------|---------------|
|------------|---------------|



- Bi-directional wall light LED suitable for external applications.
- Graphite powder coat paint finish provide a excellent corrosion resistance.
- Die-cast aluminium construction ensures maximum durability.
- Internal reflector design creates optimum light distribution for enhanced performance.
- UGR19 rated providing optimum glare control.
- LED lifetime L80 50,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|-------------------------|---------|------------------|-------|
| 4L2/2301 | Bi-directional Wall LED | 2x6W | 457 | 4000K |






• 4L2/2300

Bi-directional Wall GU10

| Features | Compliance | Specification |
|----------|------------|--|
| IP54 | CE UK CA | GU10  |

- Bi-directional wall light GU10 suitable for external applications.
- Textured paint finish and sleek design provide a modern architectural aesthetic.
- Die-cast aluminium construction ensures maximum durability.

| SKU Code | Description | Wattage |
|----------|--------------------------|--------------|
| 4L2/2300 | Bi-directional Wall GU10 | Upto 2 x 50W |








• 4L2/3000

Die-cast Wall LED

| Compliance | Specification |
|---|--|
|   | IP54   |

- Slim modern wall light with graphite paint finish.
- Die-cast aluminium construction with polycarbonate lens ensures maximum durability.
- LED lifespan L80 50,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|-------------------|---------|------------------|-------|
| 4L2/3000 | Die-cast Wall LED | 8W | 268 | 4000K |








• 4L2/6101

Modern E27 Exterior Wall Light

| Compliance | Specification |
|------------|---------------|
| | IP44 |

- Ultra modern exterior wall light
- Die-cast aluminium construction with tempered glass enclosure.
- Textured powder coated anthracite finish.

| SKU Code | Description | Wattage |
|----------|--------------------------------|---------|
| 4L2/6101 | Modern E27 Exterior Wall Light | Max 40W |





• Wall Mounted



• Low Level Mounted

LED Surface Brick Light/Wall Light

| Compliance | Specification |
|------------|---------------|
|------------|---------------|




IP54



- Architectural low level surface brick light/wall light.
- Toughened frosted glass with die-cast aluminium housing
- Graphite textured powder coat paint finish.
- LED lifespan L70 30,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|--------------------------------|---------|------------------|-------|
| 4L2/6100 | Surface Brick Light/Wall Light | 7W | 302 | 4000K |





• 4L2/3405



• 4L2/3404



Sensing Distance: Max 8±2m
Time: Min 5-10 seconds Max 5-8 minutes
LUX: <10 Lux - 2000 Lux

Decorative Lantern LED

| Compliance | Specification |
|------------|---------------|
|------------|---------------|




IP44



4L2/3405 only

- LED lantern with a modern aesthetic and resistant to corrosion.
- IP44 ingress protection rating allows a multitude of installation options.
- Textured polycarbonate finish and tinted lens.
- PIR option for convenience and security, manual override option incorporated.
- LED lifespan L70 36,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|----------------------------|---------|------------------|-------|
| 4L2/3404 | Decorative Lantern LED | 7W | 330 | 4000K |
| 4L2/3405 | Decorative Lantern LED PIR | 7.5W | 330 | 4000K |





• 4L2/3402



• 4L2/3403

g Distance: Max 8±2m
 /in 5-10 seconds Max 5-8 minutes
 0 Lux - 2000 Lux

Decorative Lantern E27

Compliance




Specification



4L2/3405 only

- Lantern with a modern aesthetic and resistant to corrosion.
- IP44 ingress protection rating allows a multitude of installation options.
- Textured polycarbonate finish and tinted lens.
- PIR option for convenience and security, manual override option incorporated.

| SKU Code | Description | Wattage |
|----------|----------------------------|---------|
| 4L2/3402 | Decorative Lantern E27 | 42W |
| 4L2/3403 | Decorative Lantern E27 PIR | 42W |





• 4L2/3407



• 4L2/3406



Sensing Distance: Max 8±2m
 Time: 30 seconds - 40 seconds
 LUX: <10 Lux

Decorative Half Lantern LED

Compliance **Specification**




IP44



4L2/3407 only

- LED half lantern with a modern aesthetic and resistant to corrosion.
- IP44 ingress protection rating allows a multitude of installation options.
- Textured polycarbonate finish and tinted lens.
- PIR option for convenience and security, manual override option incorporated.
- LED lifespan L70 36,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|---------------------------------|---------|------------------|-------|
| 4L2/3406 | Decorative Half Lantern LED | 7W | 317 | 4000K |
| 4L2/3407 | Decorative Half Lantern LED PIR | 7.5W | 317 | 4000K |





• 4L2/3400



Sensing Distance: Max 8±2m
 Time: 30 seconds - 40 seconds
 LUX: <10 Lux

• 4L2/3401

Decorative Half Lantern E27

Compliance




Specification



- Half lantern with a modern aesthetic and resistant to corrosion.
- IP44 ingress protection rating allows a multitude of installation options.
- Textured polycarbonate finish and tinted lens.
- PIR option for convenience and security, manual override option incorporated.

| SKU Code | Description | Wattage |
|----------|---------------------------------|---------|
| 4L2/3400 | Decorative Half Lantern E27 | 42W |
| 4L2/3401 | Decorative Half Lantern E27 PIR | 42W |








• 4L2/3301

Circular Bulkhead Light LED

| Features | Compliance | Specification |
|----------|------------|---------------|
| IP65 | CE UK CA | ⏚ Ra 80 |

- IP65 polycarbonate LED luminaire for external applications.
- Four conduit entry points.
- LED lifespan L70 56,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|-----------------------|---------|------------------|-------|
| 4L2/3301 | Circular Bulkhead LED | 17W | 1070 | 4000K |







• 4L2/3210

Rectangular Bulkhead LED

| Features | Compliance | Specification |
|----------|------------|---|
| IP65 | CE UK CA |   |

- All polycarbonate multipurpose bulkhead.
- Unique Visiluxe diffuser allows 90% light transmission from LED source for increased performance.
- Instant light output and unlimited switching.
- LED lifespan L70 56,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|--------------------------|---------|------------------|-------|
| 4L2/3210 | Rectangular Bulkhead LED | 5.5W | 474 | 4000K |





Die-cast Surface Low Level LED

Compliance

Specification




IP54



- Slim surface mounted low level light suitable for domestic and commercial applications.
- Die-cast aluminium construction with graphite paint finish.
- LED lifespan L70 36,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|-----------------------|---------|------------------|-------|
| 4L2/3100 | Surface Low Level LED | 5W | 128 | 4000K |






Inground LED

| Features | Compliance | Specification |
|----------|------------|---------------|
| IP67 | CE UK CA | ⊥ Ra 80 |




- Slim design inground LED suitable for residential and commercial applications.
- Allen key screws provided as standard for security.
- Brushed stainless steel bezel ensures maximum durability.
- LED reflector and internal housing design creates a low glare light distribution.
- LED lifespan L70 36,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|--------------|---------|------------------|-------|
| 4L2/2100 | Inground LED | 6W | 229 | 4000K |





IP65 Tuneable Strip Kit White LED

| Features | Compliance | Specification |
|---|---|---|
| IP65 |   |  |
| <ul style="list-style-type: none"> • 5 metre tuneable flexible strip kit with self-adhesive back. • Tuneable CCT between 3000K and 4000K. • IP65 ingress protection rating allows a multitude of installation options including external applications. • Fast and easy-fit plug and play connection from driver to LED strip. • Flexible quick-fit joint included. | | |

| SKU Code | Description | Wattage | CCT | Cutting Points |
|----------|---------------|--------------------|-------------|----------------|
| 4L2/5000 | LED Strip Kit | 30W (6W per metre) | 3000K-4000K | Every 55mm |



Professional

| 132- 152

| | |
|---------------------|-----|
| Downlights | 132 |
| Ceiling/Wall Lights | 142 |
| UFO | 146 |
| IP65 Non-Corrosive | 148 |
| Surface Linear | 150 |







• 4L1/2000/4



• 4L1/2000/4 (fitted with 4L1/2002)



• 4L1/2000/4 (fitted with 4L1/2003)



• 4L1/2000/4 (fitted with 4L1/2004)




• Low profile design allows installation into reduced height ceiling voids

Fire Rated Downlight LED

| Features | Compliance | Specification | Installation |
|----------|------------|---------------|--------------|
| | | | |

- LED dimmable fire-rated downlight for domestic applications.
- Supplied with matt white bezel as standard.
- Integral driver with push-fit loop-in, loop-out terminals for ease and speed of installation.
- LED lifespan L70 40,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|------------|--------------------|---------|------------------|-------|
| 4L1/2000/3 | Downlight LED | 8.5W | 653 | 3000K |
| 4L1/2000/4 | Downlight LED | 8.5W | 716 | 4000K |
| 4L1/2002 | Chrome Bezel | | | |
| 4L1/2003 | Satin Chrome Bezel | | | |
| 4L1/2004 | Black Bezel | | | |







• 4L1/2001



• 4L1/2000/4 (fitted with 4L1/2002)



• 4L1/2000/4 (fitted with 4L1/2003)



• 4L1/2000/4 (fitted with 4L1/2004)



• Integral switch allows user the choice of 3000K, 4000K and 6000K colour temperature options




• Low profile design allows installation into reduced height ceiling voids

Fire Rated Downlight LED CCT Selectable

| Features | Compliance | Specification | Installation |
|----------|------------|---------------|--------------|
| | | | 73mm |

- LED dimmable fire-rated downlight for domestic applications.
- Supplied with matt white, chrome and satin chrome bezels as standard.
- Integral switch allows user to change colour temperature between 3000K, 4000K and 6000K.
- Integral driver with push-fit loop-in, loop-out terminals for ease and speed of installation.
- LED lifespan L70 40,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|------------------------------|---------|------------------|-------|
| 4L1/2001 | CCT Selectable Downlight LED | 9W | 717 | 3000K |
| | | | 770 | 4000K |
| | | | 651 | 6000K |





• 4L1/2200



• 4L1/2201



• 4L1/2202




• 4L1/2202 - Profile

IP65 Fire Rated Downlight GU10

| Features | Compliance | Specification | Installation |
|----------|------------|---------------|--------------|
| IP65 | | | 76mm |

- Compact Fire Rated downlight for shallow ceiling voids.
- Twistlock lamp retaining ring for ease of lamp replacement.
- Protective sheathing spring clips for ease of installation and ceiling protection.
- Suitable for standard GU10 halogen or LED lamps.

| SKU Code | Description | Wattage |
|----------|-------------------|----------|
| 4L1/2200 | Matt White GU10 | Upto 50W |
| 4L1/2201 | Chrome GU10 | Upto 50W |
| 4L1/2202 | Satin Chrome GU10 | Upto 50W |







• 4L1/2206









• 4L1/2208




• 4L1/2206 - Profile

Fire Rated Adjustable Downlight GU10

| Features | Compliance | Specification | Installation |
|---|---|---|--|
|  |    |  |  80mm |

- Compact Fire Rated adjustable downlight for shallow ceiling voids.
- Twistlock lamp retaining ring for ease of lamp replacement.
- Protective sheathing spring clips for ease of installation and ceiling protection.
- Suitable for standard GU10 halogen or LED lamps.

| SKU Code | Description | Wattage |
|----------|-------------------|----------|
| 4L1/2206 | Chrome GU10 | Upto 50W |
| 4L1/2207 | Matt White GU10 | Upto 50W |
| 4L1/2208 | Satin Chrome GU10 | Upto 50W |





• 4L1/2204



• 4L1/2203










• 4L1/2205




• 4L1/2206 - Profile

IP20 Fire Rated Downlight GU10

| Features | Compliance | Specification | Installation |
|---|---|---|--|
|  |     |  |  76mm |

- Compact Fire Rated downlight for shallow ceiling voids.
- Twistlock lamp retaining ring for ease of lamp replacement.
- Protective sheathing spring clips for ease of installation and ceiling protection.
- Suitable for standard GU10 halogen or LED lamps.

| SKU Code | Description | Wattage |
|----------|-------------------|----------|
| 4L1/2203 | Chrome GU10 | Upto 50W |
| 4L1/2204 | Matt White GU10 | Upto 50W |
| 4L1/2205 | Satin Chrome GU10 | Upto 50W |





• 4L1/2102/4



• 4L1/2100



• 4L1/2101



• 4L1/2103




• 4L1/2102/4 - Profile

IP65 Downlight LED

| Features | Compliance | Specification | Installation |
|----------|------------|---------------|--------------|
| IP65 | CE UK CA | □ 60° Ra 80 | ⚙️ 68mm-78mm |

- Compact polycarbonate IP65 LED downlight allows for a range of installation applications.
- Low profile design integral driver with loop-in, loop-out terminals for ease and speed of installation.
- Option of chrome and satin chrome bezel accessories.
- LED lifespan L70 25,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|------------|--------------------|---------|------------------|-------|
| 4L1/2102/3 | Downlight LED | 5W | 389 | 3000K |
| 4L1/2102/4 | Downlight LED | 5W | 399 | 4000K |
| 4L1/2100 | Chrome Bezel | | | |
| 4L1/2101 | Satin Chrome Bezel | | | |
| 4L1/2103 | Black Bezel | | | |











• 4L1/3001




• 4L1/3000


IP54 Ceiling/Wall Light LED

| Features | Compliance | Specification |
|--|---|---|
| IP54  |  |   |

- Ultra slim modern polycarbonate wall/ceiling light.
- Rear fixing bracket and terminal housing ensures a fast and easy installation.
- IP54 rating and suitable for bathroom use.
- LED lifespan L70 50,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|----------|------------------------|---------|------------------|-------|
| 4L1/3001 | Wall/Ceiling Light | 18W | 1524 | 4000K |
| 4L1/3000 | Chrome Bezel Accessory | | | |





“ IF YOU’LL NOT SETTLE FOR ANYTHING LESS
THAN YOUR **BEST**,
YOU WILL BE AMAZED AT WHAT YOU CAN
ACCOMPLISH IN YOUR LIVES ”



• 4L1/3101/4


IP65 Wall/Ceiling LED

| Features | Compliance | Specification |
|----------|------------|---------------|
|----------|------------|---------------|

| | | |
|--|---|---|
| IP65  |  |  |
|--|---|---|

- Slim wall/ceiling light with contemporary aesthetic.
- All polycarbonate construction with opal diffuser and white trim ring.
- Full IP65 ingress protection rating allows a multitude of installation options including bathrooms.
- LED lifespan L70 56,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT |
|---------------|----------------------------------|---------|------------------|-------|
| 4L1/3101/3 | Wall/Ceiling LED | 13W | 890 | 3000K |
| 4L1/3101/4 | Wall/Ceiling LED | 13W | 929 | 4000K |
| 4L1/3101/3/10 | Emergency 3000K | | | |
| 4L1/3101/3/11 | Microwave Sensor 3000K | | | |
| 4L1/3101/3/12 | Emergency Microwave Sensor 3000K | | | |
| 4L1/3101/4/10 | Emergency 4000K | | | |
| 4L1/3101/4/11 | Microwave Sensor 4000K | | | |
| 4L1/3101/4/12 | Emergency Microwave Sensor 4000K | | | |












• 4L3/1203




UFO LED

| Features | Compliance | Specification |
|--|---|---|
| IP65  |  |  |

- Low profile UFO LED high bay suitable for industrial, commercial and retail applications.
- IP65 ingress protection allows for a range of installation options.
- Die-cast powder coated body and heatsink provides excellent thermal performance and enhances LED performance.
- 1-10V dimmable as standard.
- LED lifespan L80 50,000 hours.





| SKU Code | Description | Wattage | Lumens Delivered | CCT | A |
|----------|-------------|---------|------------------|-------|-----|
| 4L3/1203 | UFO LED | 100W | 12062 | 4000K | 176 |
| 4L3/1204 | UFO LED | 150W | 17913 | 4000K | 186 |
| 4L3/1205 | UFO LED | 200W | 24120 | 4000K | 198 |








IP65 Non-Corrosive LED

| Features | Compliance | Specification |
|----------|---|---|
| IP65 |   |   |

- Unique luminaire fixing clip design allows option of mounting onto BESA box.
- LED performance allows point-to-point replacement of existing fluorescent luminaires.
- Lockable heavy-duty stainless steel clips supplied as standard for added safety and security.
- LED lifespan L70 30,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT | A | B | C | D |
|----------|-----------------------|---------|------------------|-------|--------|--------|------|-------|
| 4L3/1100 | 4 Foot Single NCF LED | 20W | 2088 | 4000K | 1266mm | 860mm | 75mm | 85mm |
| 4L3/1101 | 5 Foot Single NCF LED | 28W | 3230 | 4000K | 1566mm | 960mm | 75mm | 85mm |
| 4L3/1102 | 6 Foot Single NCF LED | 35W | 3823 | 4000K | 1866mm | 1030mm | 80mm | 85mm |
| 4L3/1103 | 4 Foot Twin NCF LED | 40W | 4425 | 4000K | 1266mm | 860mm | 75mm | 118mm |
| 4L3/1104 | 5 Foot Twin NCF LED | 58W | 6353 | 4000K | 1566mm | 960mm | 75mm | 118mm |
| 4L3/1105 | 6 Foot Twin NCF LED | 70W | 7320 | 4000K | 1866mm | 1030mm | 80mm | 118mm |

| | |
|-----|-----------------------------------|
| /10 | Emergency Option |
| /11 | Microwave Sensor Option |
| /12 | Microwave Sensor Emergency Option |








IP20 Surface Linear LED

Compliance **Specification**



- High specification LED batten suitable for a range of applications.
- Steel body construction with powder coat finish and polycarbonate end caps.
- Opal diffuser design optimises performance and light distribution.
- LED lifespan L70 36,000 hours.

| SKU Code | Description | Wattage | Lumens Delivered | CCT | A |
|----------|-------------------------|---------|------------------|-------|--------|
| 4L3/2000 | 4 Ft Surface Linear LED | 27W | 2616 | 4000K | 1246mm |
| 4L3/2001 | 4 Ft Surface Linear LED | 45W | 4939 | 4000K | 1246mm |
| 4L3/2002 | 5 Ft Surface Linear LED | 32W | 3656 | 4000K | 1547mm |
| 4L3/2003 | 5 Ft Surface Linear LED | 54W | 6325 | 4000K | 1547mm |
| 4L3/2004 | 6 Ft Surface Linear LED | 41W | 4814 | 4000K | 1847mm |
| 4L3/2005 | 6 Ft Surface Linear LED | 73W | 8232 | 4000K | 1847mm |



Important Information

The information, technical specification and photography contained in this catalogue is representative of general models, correct at time of going to press. All dimensions are advisory and should be checked and confirmed prior to any crucial installation procedures such as ceiling cut-outs taking place. Whilst suggestions regarding luminaire applications are given, it is the responsibility of the installer to verify suitability. 4Lite reserves the right to make any modification necessary to parts or details without prior notice.

